


| ベルト幅別 取付高さ区分表 | | | | | | 70 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 500 | 600 | | | | | | B (ベルト幅) |
|--------------------------------|------------------------|----------------|----------------|----------------|------------|----------------------------|-------|-----|-----|-----|-----|------|-----|-----|-----|--|-----|--|--|---------|-----------|
| 脚高さ寸法 | | | | | | 110 | 140 | 190 | 240 | 290 | 340 | 390 | 460 | 560 | 660 | | | | | | W (フレーム幅) |
| スキマ h = 50 形 コンベヤ高さ H | 中間取付形 SZ, SMJ, SC 形 | | | | ツナギ材 数量 | FBC 脚 W ₂ | | | | | | | | | | | 脚形式 | | | | |
| | H ₁ | H ₂ | H ₃ | H ₄ | | | FBC 脚 | | | | | FC 脚 | | | | | | | | | |
| 350 | | | | | - | - | | | | | | | | | | | | | | ▽H=350 | |
| 400 | 367 | 192 | - | - | 1 | | | | | | | | | | | | | | | ▽H=550 | |
| 450 | 417 | 242 | - | - | 1 | | | | | | | | | | | | | | | | |
| 500 | 467 | 292 | - | - | 1 | 290 | | | | | | | | | | | | | | | |
| 550 | 517 | 342 | - | - | 1 | | | | | | | | | | | | | | | | |
| 600 | 567 | 392 | 175 | - | 2 | | | | | | | | | | | | | | | | |
| 650 | 617 | 442 | 225 | - | 2 | | | | | | | | | | | | | | | | |
| 700 | 667 | 492 | 275 | - | 2 | 390 | | | | | | | | | | | | | | | |
| 750 | 717 | 542 | 325 | - | 2 | | | | | | | | | | | | | | | | |
| 800 | 767 | 592 | 375 | - | 2 | | | | | | | | | | | | | | | | |
| 850 | 817 | 642 | 425 | - | 2 | | | | | | | | | | | | | | | | |
| 900 | 867 | 692 | 475 | - | 2 | 510 | | | | | | | | | | | | | | | |
| 1000 | 967 | 792 | 575 | - | 2 | | | | | | | | | | | | | | | ▽H=1000 | |
| 1100 | 1067 | 892 | 675 | - | 2 | | | | | | | | | | | | | | | ▽H=1100 | |
| 1200 | 1167 | 992 | 400 | 375 | 3 | | | | | | | | | | | | | | | | |
| 1300 | 1267 | 1092 | 450 | 425 | 3 | | | | | | | | | | | | | | | | |
| 1400 | 1367 | 1192 | 500 | 475 | 3 | 810 | | | | | | | | | | | | | | | |
| 1500 | 1467 | 1292 | 550 | 525 | 3 | | | | | | | | | | | | | | | | |
| 1600 | 1567 | 1392 | 600 | 575 | 3 | | | | | | | | | | | | | | | | |
| 1700 | 1667 | 1492 | 650 | 625 | 3 | | | | | | | | | | | | | | | | |
| 1800 | 1767 | 1592 | 475 | 425 | 4 | 1010 | | | | | | | | | | | | | | | |
| 1900 | 1867 | 1692 | 500 | 475 | 4 | | | | | | | | | | | | | | | | |
| 2000 | 1967 | 1792 | 525 | 550 | 4 | | | | | | | | | | | | | | | | |

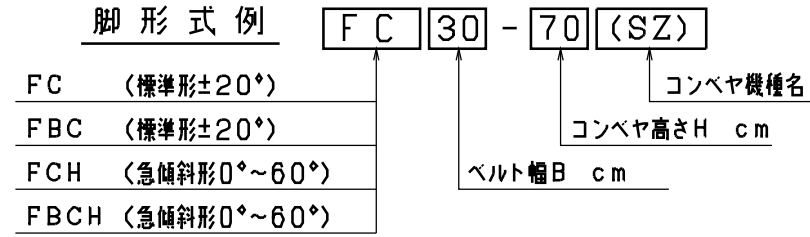

| 部品 | 品番 | 名称 | 数量 | 標準図面番号 |
|-----------|-----|---------------|-----|-----------------|
| ○ | B1 | 六角穴付セムスボタンボルト | 4 | M5×15 |
| ○ | B2 | 六角セムスボルト | ②×4 | M8×18 |
| 斜材取付用 | B3 | 六角セムスボルト | ⑥×2 | M8×18 N |
| ツナギ材取付時不要 | B4 | 六角セムスボルト | 4 | M8×18 N |
| ○ | B5 | 六角ボルト | 2 | M12×20 W,SW |
| ○ | 9 | 脚用タップピース | 2 | SM-4020-1 |
| ○ | 8 | FB脚座 | 1 | SM-7152 |
| ○ | 7 | ゴムキャップ | 2 | KP-4 |
| ○ | 6 | 斜材 | 表記 | SM-7131 |
| ○ | 5 | 連結パイプ | 1 | SM-7966-2 |
| ○ | 4 | φ60キャスターユニット | 2 | SM-7970 |
| ○ | 3-2 | ブラケット(急傾斜用) | 2 | SM-7154 ② SMH用 |
| ○ | 3-1 | ブラケット | 2 | SM-7153 ② SMH用 |
| ○ | 2 | ツナギ材 | 表記 | SM-7151 |
| ○ | 1 | 脚柱 | 2 | SM-7121 SM-7122 |

本CADデータを使用される場合は、仕様表・注記を必ずご確認ください。